

POLYFLEX PLUS

- Homogeneous general purpose vinyl floor tile
- Available in traditional and duotone marbling

SPECIFICATION



1.5mm
2.0mm
2.5mm




1.5mm: 300 x 300mm = 4.5m²
2.0mm: 300 x 300mm = 4.5m²
2.5mm: 300 x 300mm = 3.6m²



1.5mm: 2800g/m²
2.0mm: 3800g/m²
2.5mm: 4860g/m²



GENERAL PERFORMANCE
EN 649

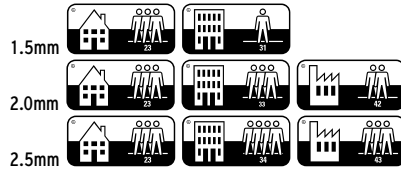

REACTION TO FIRE
EN 13501-1 Class Bfl-S1
ASTM E648 Class 1

EN ISO 9239-1 ≥8kw/m²
EN ISO 11925-2 Pass



SLIP RESISTANCE
EN 13893 Class DS



DIMENSIONAL STABILITY
EN 649



FLEXIBILITY
EN 649 40mm mandrel



INDENTATION - RESIDUAL
EN 649



ENVIRONMENTALLY PREFERABLE FLOORING
Polyflex Plus PU has a generic BRE Global A+/A Rating in the Green Guide to Specification. Polyflex Plus PU is 100% recyclable and contains 25% recycled material. A full Environmental Report detailing Polyflor's achievements in areas such as recycling, energy reduction and waste avoidance can be found at www.polyflor.com/environment



APPLICATIONS
Polyflex Plus PU is a durable, general purpose vinyl tile suitable for most contract situations. The excellent performance makes Polyflex Plus PU a good choice in schools, supermarkets, offices, etc. The 1.5mm gauge tile is a particularly suitable and economical solution for housing applications.



For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com.

At the date of issue the data presented is correct.
However, Polyflor Ltd. reserves the right to make changes which do not adversely affect performance or quality.



POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK
TEL: +44 (0)161 767 1111 UK SALES DIRECT: +44 (0)161 767 1122 UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166 E-MAIL: INFO@POLYFLOR.COM WWW.POLYFLOR.COM
UK SAMPLE REQUESTS: +44 (0)161 767 2551

James Hulstead
FLOORING



POLYFLOR
POLYFLEX PLUS ^{PU}

SEMI FLEXIBLE TILES

PERFORMANCE AND PROPERTIES

