






# Ejecta Accessories

## PRODUCT SPECIFICATION

### Key Features

- > PVC profiles for use with Polyflor & Polysafe ranges
- > Strip or coil in various design colours
- > Flexible for easier installation & handling
- > Ideal for hygiene critical locations
- > 100% recyclable

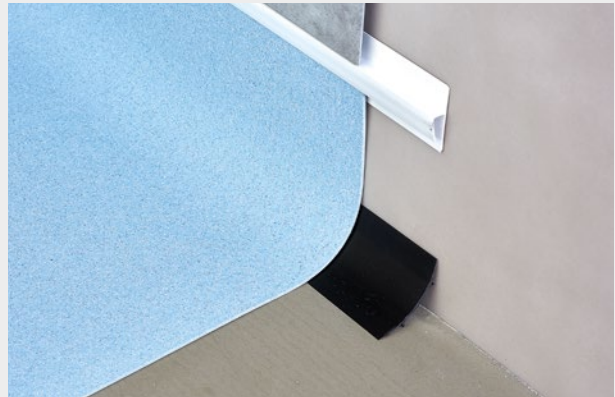

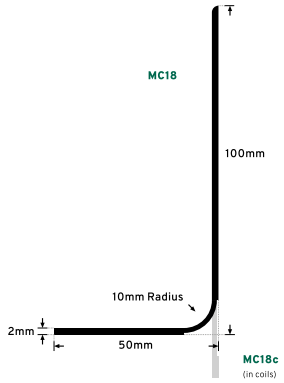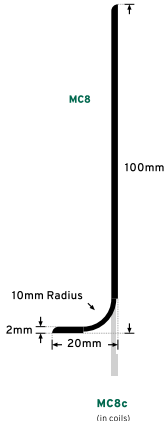
<b>1. PROPRIETARY PRODUCT /MANUFACTURER</b>	<p>1.1 Proprietary Product: Ejecta Accessories</p> <p>1.2 Manufacturer: Polyflor Limited, PO Box 3, Radcliffe New Road, Whitefield, Manchester M45 7NR Web: www.polyflor.com Tel: +44 (0)161 767 1912</p>
<b>2. PROPRIETARY PRODUCT DESCRIPTION</b>	<p>2.1 Construction: The Polyflor Ejecta range of flooring accessories are PVC profiles which are ideal for use with the Polyflor range of products. They include covered skirtings that are fitted before the flooring is laid and can be welded to provide a secure joint (set-in) or after, to provide a neat finish (sit-on). Sheet flooring may be taken up the wall having created a radius using a cove former and capping strip ensures a continuous sealed surface.</p> <p>The benefits of a sealed, easily maintained surface are invaluable in hospitals and other similar locations where hygiene is of paramount importance.</p>
<b>3. STYLES &amp; PHYSICAL CHARACTERISTICS:</b>	<p>3.1 Set-in Coveing</p> <p><b>MC18 (shaped profile)</b> Profile size: 50 x 100mm Unit length: 2 metres Pack size: 20 x 2 metres Colours: 15 ex-stock</p> <p><b>MC18c (coiled profile)</b> Profile size: 50 x 100mm Unit length: 20 metres coil Pack size: 20 metres coil* Colours: 15 ex-stock</p>  <p>3.2 Sit-on Coveing</p> <p><b>MC14 (shaped profile)</b> Profile size: 20 x 75mm Unit length: 2 metres Pack size: 20 x 2 metres Colours: 15 ex-stock</p> <p><b>MC8 (shaped profile)</b> Profile size: 20 x 100mm Unit length: 2 metres Pack size: 20 x 2 metres Colours: 15 ex-stock</p> <p><b>MC8c (coiled profile)</b> Profile size: 20 x 100mm Unit length: 20 metres coil Pack size: 20 metres coil* Colours: 15 ex-stock</p>   

## 3.3 Corner Cap

**EFA 75 (shaped profile)**


Profile size: 75 x 75mm  
 Unit length: 2 metres  
 Pack size: 10 x 2 metres  
 Colours: Black

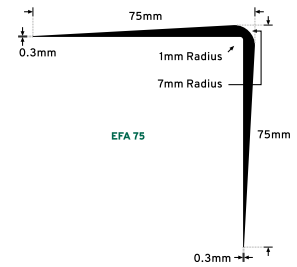


## 3.4 Cove Former

**CF20 (shaped profile)**

Profile size: 20 x 20mm  
 Unit length: 2 metres  
 Pack size: 30 x 2 metres  
 Colours: Black

**CF38 (shaped profile)**

Profile size: 38 x 38mm  
 Unit length: 2 metres  
 Pack size: 15 x 2 metres  
 Colours: Black




## 3.5 Capping Strip

**CS (coiled profile)**

Profile size: 20mm  
 Unit length: 20 metres coil  
 Pack size: 20 metres coil\*  
 Colours: Black

**CT (shaped profile)**

Profile size: 41mm  
 Unit length: 2 metres  
 Pack size: 50 x 2 metres  
 Colours: White

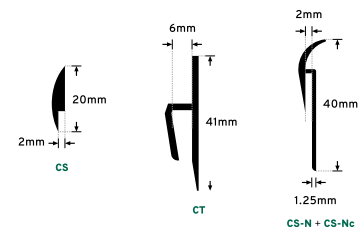**CS-N (shaped profile)**

Profile size: 40mm  
 Unit length: 2 metres  
 Pack size: 40 x 2 metres  
 Colours: 15 ex-stock


**CS-Nc (coiled profile)**

Profile size: 40mm  
 Unit length: 20 metres coil  
 Pack size: 20 metres coil\*  
 Colours: 15 ex-stock


## 3.6 Floormitre

**CCTM1 (Trimitre)**


Profile size: 100(h) x 100(w) x 100(d)mm  
 Pack size: 50  
 Colours: Black

**CCFM1 (Internal)**

Profile size: 145(h) x 100(w) x 100(d)mm  
 Pack size: 50  
 Colours: Black

**CCFM2 (External)**


Profile size: 145(h) x 145(w) x 145(d)mm  
 Pack size: 50  
 Colours: Black



---

**3.7 Weld Rod**

Profile size: 4mm  
 Unit length: 100 metres coil  
 Pack size: 100 metres coil  
 Colours: as per sheet flooring



\*Supplied in standard packs only.

---

**4. PRODUCT PERFORMANCE AND TECHNICAL DATA**

Polyflor vinyl skirting/coving is designed to be installed in conjunction with vinyl floor coverings.

Manufactured from filled PVC which has inherently good performance with regards to flame spread and smoke, as evidenced by the extensive fire performance certification available for Polyflor products.

The fire performance test used for floorings cannot be directly applied to covings due to the difference in product formats. However, as both floorings and covings are made from the same raw material base, the covings will give the same fire performance as floor covering products.

100% recyclable.

---

**5. INSTALLATION**

See Polyflor Technical Information Manual > Recommended Finishes section for complete details.

---

**6. MAINTENANCE**

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements.

Refer to Polyflor Technical Information Manual for complete maintenance details.

---

**7. TECHNICAL SERVICES**

Visit us on the web at [www.polyflor.com](http://www.polyflor.com)

Contact Customer Technical Services Department (CTSD) for advice on +44 (0)161 767 1912.

Polyflor also recommends the use of Floormitre from Cutting Corners Mitre Makers Ltd: [www.cuttingcorners.org.uk](http://www.cuttingcorners.org.uk).


These are especially useful when installing in Clean Rooms where both walls and ceilings require covering by creating a seamless and hygienic transition.

Samples: Submittal samples for verification and approval available upon request from Polyflor. Samples shall be submitted in compliance with the requirements of the contract documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project.

---


# Ejecta Accessories

## RANGE SHADES



White **9520**  
NCS S 0502-Y50R

LRV 79



Light Fawn **9590**  
NCS S 2005-Y40R

LRV 53



Light Beige **9610**  
NCS S 2010-Y40R

LRV 42



Fawn **9580**  
NCS S 3005-Y50R

LRV 37



Brown **9560**  
NCS S 5020-Y20R

LRV 24



Cream **9630**  
NCS S 2020-Y10R

LRV 44




Beige **9600**  
NCS S 3020-Y40R

LRV 29



Russet **9620**  
NCS S 4030-Y70R

LRV 18




Dark Brown **9570**  
NCS S 7010-Y90R

LRV 8



Green **9640**  
NCS S 5010-G70Y

LRV 23




Light Grey **9550**  
NCS S 2502-B

LRV 47



Grey **9540**  
NCS S 4502-G

LRV 29



Dark Grey **9530**  
NCS S 5005-R80B

LRV 23



Blue **9650**  
NCS S 3020-B

LRV 29



Black **9510**  
NCS S 8000-N

LRV 4

LRV - Light Reflectance Value

NCS - Natural Colour System

### Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: [info@polyflor.com](mailto:info@polyflor.com) • [www.polyflor.com](http://www.polyflor.com)

© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

V3