




Ejecta Accessories

PRODUCT SPECIFICATION

Key Features

- > PVC profiles for use with Polyflor & Polysafe ranges
- > Strip or coil in various design colours
- > Flexible for easier installation & handling
- > Ideal for hygiene critical locations
- > 100% recyclable

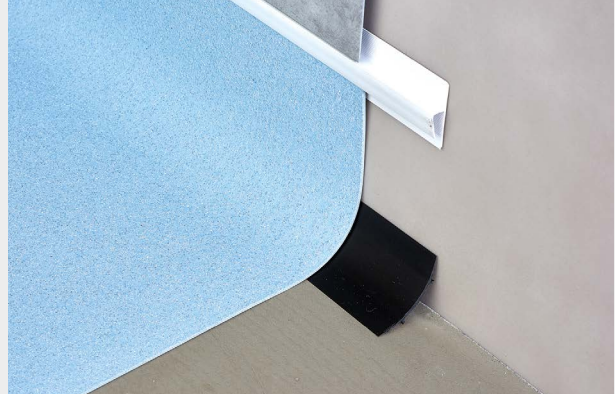


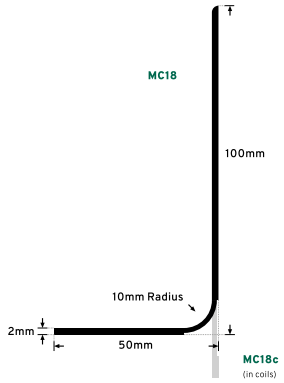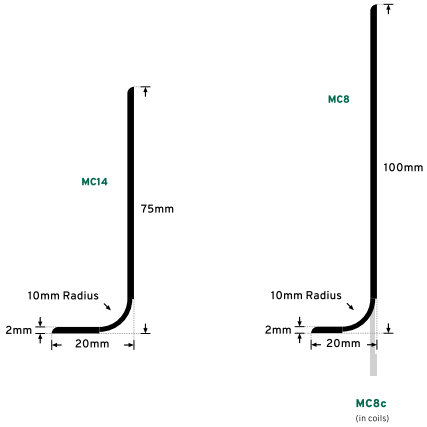1. PROPRIETARY PRODUCT /MANUFACTURER	<p>1.1 Proprietary Product: Ejecta Accessories</p> <p>1.2 Manufacturer: Polyflor Limited, PO Box 3, Radcliffe New Road, Whitefield, Manchester M45 7NR Web: www.polyflor.com Tel: +44 (0)161 767 1912</p>
2. PROPRIETARY PRODUCT DESCRIPTION	<p>2.1 Construction: The Polyflor Ejecta range of flooring accessories are PVC profiles which are ideal for use with the Polyflor range of products. They include covered skirtings that are fitted before the flooring is laid and can be welded to provide a secure joint (set-in) or after, to provide a neat finish (sit-on). Sheet flooring may be taken up the wall having created a radius using a cove former and capping strip ensures a continuous sealed surface.</p> <p>The benefits of a sealed, easily maintained surface are invaluable in hospitals and other similar locations where hygiene is of paramount importance.</p>
3. STYLES & PHYSICAL CHARACTERISTICS:	<p>3.1 Set-in Coveing</p> <p>MC18 (shaped profile) Profile size: 50 x 100mm Unit length: 2 metres Pack size: 20 x 2 metres Colours: 15 ex-stock</p> <p>MC18c (coiled profile) Profile size: 50 x 100mm Unit length: 20 metres coil Pack size: 20 metres coil* Colours: 15 ex-stock</p>  <p>3.2 Sit-on Coveing</p> <p>MC14 (shaped profile) Profile size: 20 x 75mm Unit length: 2 metres Pack size: 20 x 2 metres Colours: 15 ex-stock</p> <p>MC8 (shaped profile) Profile size: 20 x 100mm Unit length: 2 metres Pack size: 20 x 2 metres Colours: 15 ex-stock</p> <p>MC8c (coiled profile) Profile size: 20 x 100mm Unit length: 20 metres coil Pack size: 20 metres coil* Colours: 15 ex-stock</p> 

3.3 Corner Cap

EFA 75 (shaped profile)


Profile size: 75 x 75mm
 Unit length: 2 metres
 Pack size: 10 x 2 metres
 Colours: Black

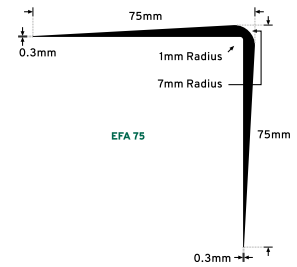


3.4 Cove Former

CF20 (shaped profile)

Profile size: 20 x 20mm
 Unit length: 2 metres
 Pack size: 30 x 2 metres
 Colours: Black

**CF38 (shaped profile)**

Profile size: 38 x 38mm
 Unit length: 2 metres
 Pack size: 15 x 2 metres
 Colours: Black

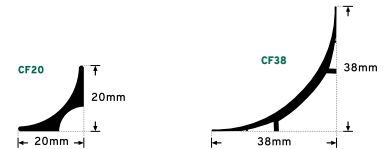


3.5 Capping Strip

CS (coiled profile)

Profile size: 20mm
 Unit length: 20 metres coil
 Pack size: 20 metres coil*
 Colours: Black

CT (shaped profile)

Profile size: 41mm
 Unit length: 2 metres
 Pack size: 50 x 2 metres
 Colours: White

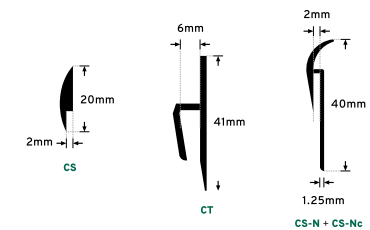**CS-N (shaped profile)**


Profile size: 40mm
 Unit length: 2 metres
 Pack size: 40 x 2 metres
 Colours: 15 ex-stock

CS-Nc (coiled profile)

Profile size: 40mm
 Unit length: 20 metres coil
 Pack size: 20 metres coil*
 Colours: 15 ex-stock

3.6 Weld Rod

Profile size: 4mm
 Unit length: 100 metres coil
 Pack size: 100 metres coil
 Colours: as per sheet flooring



*Supplied in standard packs only.

4. PRODUCT PERFORMANCE AND TECHNICAL DATA

Polyflor vinyl skirting/coving is designed to be installed in conjunction with vinyl floor coverings.

Manufactured from filled PVC which has inherently good performance with regards to flame spread and smoke, as evidenced by the extensive fire performance certification available for Polyflor products.

The fire performance test used for floorings cannot be directly applied to covings due to the difference in product formats. However, as both floorings and covings are made from the same raw material base, the covings will give the same fire performance as floor covering products.

100% recyclable.

5. INSTALLATION

See Polyflor Technical Information Manual > Recommended Finishes section for complete details.

6. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements.

Refer to Polyflor Technical Information Manual for complete maintenance details.

7. TECHNICAL SERVICES


Visit us on the web at www.polyflor.com

Contact Customer Technical Services Department (CTSD) for advice on +44 (0)161 767 1912.

Samples: Submittal samples for verification and approval available upon request from Polyflor. Samples shall be submitted in compliance with the requirements of the contract documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project.

Ejecta Accessories

RANGE SHADES




White 9520
NCS S 0502-Y50R LRV 79



Light Fawn 9590
NCS S 2005-Y40R LRV 53



Light Beige 9610
NCS S 2010-Y40R LRV 42



Fawn 9580
NCS S 3005-Y50R LRV 37



Brown 9560
NCS S 5020-Y20R LRV 24



Cream 9630
NCS S 2020-Y10R LRV 44



Beige 9600
NCS S 3020-Y40R LRV 29



Russet 9620
NCS S 4030-Y70R LRV 18



Dark Brown 9570
NCS S 7010-Y90R LRV 8




Green 9640
NCS S 5010-G70Y LRV 23



Light Grey 9550
NCS S 2502-B LRV 47



Grey 9540
NCS S 4502-G LRV 29



Dark Grey 9530
NCS S 5005-R80B LRV 23



Blue 9650
NCS S 3020-B LRV 29



Black 9510
NCS S 8000-N LRV 4

LRV - Light Reflectance Value

NCS - Natural Colour System

Polyflor Ltd. Head Office

PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR • Tel: +44 (0) 161 767 1111 • Email: info@polyflor.com • www.polyflor.com

© At the time of writing and publication of sheet, all the information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties.

V2